

(19)



(11)

EP 2 263 005 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
04.09.2013 Bulletin 2013/36

(51) Int Cl.:
F03G 3/00 (2006.01)

(21) Application number: **08852400.4**

(86) International application number:
PCT/EP2008/009948

(22) Date of filing: **24.11.2008**

(87) International publication number:
WO 2009/065619 (28.05.2009 Gazette 2009/22)

(54) METHOD AND APPARATUS FOR STORING ENERGY

VERFAHREN UND VORRICHTUNG ZUM SPEICHERN VON ENERGIE

PROCÉDÉ ET APPAREIL POUR STOCKER DE L'ÉNERGIE

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MT NL NO PL PT
RO SE SI SK TR**

(72) Inventor: **Al-Khamis, Mohammed Abdulaziz
11691 Riyadh (SA)**

(30) Priority: **24.11.2007 GC L20079531**

(74) Representative: **Appelt, Christian W.
Boehmert & Boehmert
Pettenkoferstrasse 20-22
80336 München (DE)**

(43) Date of publication of application:
22.12.2010 Bulletin 2010/51

(56) References cited:
**DE-A1- 10 037 678 DE-U1-202004 011 770
GB-A- 2 090 939 GB-A- 2 224 807**

(73) Proprietor: **King Saud University
11421 Riyadh (SA)**

EP 2 263 005 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a method and apparatus for storing energy.

[0002] It is a common concern to all providers of electrical energy to match the demand for electricity with their ability to provide electricity. In the course of, for instance, a day, demand typically rises to a high level during certain peak times and falls to lower levels during off-peak times. To meet the peak time demand and make use of any surplus electricity which may be available during off-peak times, electricity providers aim to store surplus energy produced during off-peak times in order to supply this surplus energy during peak times. The source of energy can be either a power plant generating electricity at a more or less constant level or some form of intermittent energy source, such as a solar powered energy source or a wind powered energy source.

[0003] An example of such a system is discussed in US 5,873,249. Therein, a system is provided for generating energy using the difference in elevation between a relatively high elevation and a relatively low elevation, the system comprising a weight; a lifting device for lifting the weight from the relatively low elevation to the relatively high elevation and for enabling lowering of the weight from the relatively high elevation to the relatively low elevation; a generator for producing electrical energy for consumption; means for converting energy produced by said lifting device during lowering of said weight into drive energy for driving said generator; an electric motor for driving said lifting device to provide lifting of said weight and for driving said generator; and an intermittently operating energy source for supplying electrical energy to the electric motor during operation of the energy source to drive the generator and to enable lifting of the weight by the lifting device whereby the weight can be lifted during operation of the energy source to provide potential energy for the system. Similar devices are known from GB 2224807 A and DE 20 2004 011 770 U1. Thus, the source of potential energy provided by the weight in the raised position assists in evening out or making more uniform the overall energy that can be supplied. Said system, however, only refers to a single weight, which is being raised and lowered. This limits the flexibility and versatility of the system known in the prior art. While US 5,873,249 also mentions the possibility to have more than one lifting device capable of lifting a respective weight, those embodiments show a high degree of redundancy in that e.g. with every lifting device separate conversion means and a separate generator are associated.

[0004] It is therefore an object of the present invention to provide a method and a system for storing energy showing improved flexibility and versatility and reduced redundancy.

[0005] An energy storing system according to the present invention comprises an energy storing system, comprising a plurality of weights, a first storing unit and

a second storing unit, wherein the first storing unit is arranged below (i.e. at a lower elevation than) the second storing unit and each of the storing units comprises a guiding track on which weights can be placed and along which weights can be moved, wherein each of said guiding tracks comprises a first portion and a second portion, wherein each second portion is arranged below (i.e. at a lower elevation than) its corresponding first portion; and a loading unit configured to lift at least one weight from the first storing unit to the second storing unit during a first period thereby converting electrical energy to potential energy, said loading unit further configured to lower said at least one weight from the second storing unit to the first storing unit during a second period, thereby converting potential energy to electrical energy, wherein the loading unit is configured to collect a weight from the second portion of the first storing unit and to place said weight on the first portion of the second storing unit during the first period and to collect a weight from the second portion of the second storing unit and to place said weight on the first portion of the first storing unit during the second period.

[0006] The energy storing system according to the present invention provides for a flexible and scalable system due to the possibility to use a plurality of weights and to operate in a cyclical manner.

[0007] To allow each weight to move freely along the guiding track on which it is placed, each weight preferably comprises wheels. Those wheels are configured to allow said weight to move from the first, higher portion of said guiding track to the second, lower portion of said guiding track preferably by the action of gravity alone. Thus, a weight which was placed on the first portion of the second storing unit during the first period will move to the second portion of the second storing unit and be ready for collection at the beginning of the second period.

[0008] In a preferred embodiment, the loading mechanism comprises a loading stage having a guiding track configured to cooperate with the respective guiding track of any of the storing units to facilitate direct transfer of the weight between the loading stage and the respective guiding track.

[0009] In another preferred embodiment said energy storing system comprises a multitude of storing units arranged at different heights, whereby an even higher degree of versatility is possible. In a preferred embodiment of the present invention, the number of weights transferred during both the first and the second period is equal, whereas the duration of the second period is different from the duration of the first period. Thus, it is possible to generate a higher/lower power level during the lowering of a particular total weight compared to the power level used during lifting of said total weight, wherein power is defined as converted energy per unit of time.

[0010] A method according to the present invention comprises the steps of providing a plurality of weights; providing a first and a second storing unit, wherein the first storing unit is arranged below the second storing

unit; lifting at least one weight from the lower storing unit to the upper storing unit during a first period thereby converting electrical energy to potential energy; and lowering said at least one weight from the upper storing unit to the lower storing unit during a second period, wherein the duration of the second period is different from the duration of the first period, thereby converting potential energy to electrical energy.

[0011] Preferably the second period is either shorter or longer than the first period so as to be able to provide a higher/lower power level during the second period in comparison to the power level used during the first period.

[0012] In a preferred embodiment, the first period is an off-peak electricity period whereas the second period is a peak electricity period.

[0013] Further details of the present invention will become clear from the detailed description and the accompanying figures, wherein:

Figure 1 schematically shows an energy storing system according to the present invention;

Figure 2 shows a storing unit to be used in an energy storing system according to the present invention;

Figure 3 shows details of the loading units to be used in the energy storing system according to the present invention; and

Figure 4 shows two upper storing units to be used in an energy storing system according to the present invention.

[0014] Figure 1 is a schematic diagram showing an embodiment of the energy storing system 10 according to the present invention.

[0015] The energy storing system 10 comprises a plurality of weights 12, one of which being indicated in figure 1. The energy storing system 10 further comprises a first storing unit 14 and a second storing unit 16, wherein the first storing unit 14 is arranged below the second storing unit 16. Each of the storing units 14, 16 comprises a guiding track 18, 20 on which weights can be placed and along which weights can be moved. The first, lower guiding track 18 comprises a first portion 22 and a second portion 24, wherein the second portion 24 is arranged slightly below the first portion 22. Similarly, the second, upper guiding track 20 comprises a first portion 26 and a second portion 28, wherein the second portion 28 is arranged slightly below the first portion 26.

[0016] The energy storing system further comprises a loading unit 30 comprising a loading stage 32. As indicated in figure 1, said loading stage 32 can be moved up and down in between the first and second storing units 14, 16 in a predominantly vertical direction.

[0017] Shown in the left hand part of figure 1 is the transfer of a weight 12 from the lower portion 24 of the lower storing unit 14 on to the loading stage 32 (indicated

by an arrow). Said weight 12 on loading stage 32 can then be lifted up to the second storing unit 16. To this end, the loading stage 32 is raised to and aligned with the first, upper portion 26 of the guiding track 20 of the second storing unit 16, as shown in the right hand part of figure 1. Subsequently, said weight 12 is transferred or placed on the guiding track 20. This latter operation is indicated by the arrow shown in the right hand part of figure 1.

[0018] Since the first portion 26 of guiding track 20 is arranged at a higher position/elevation relative to the second portion 28 thereof, weight 12 will move along the guiding track 20 from position "A" in the first portion 26 to position "B" in the second portion 28, since each weight 12 is fitted with wheels 13 allowing said weight 12 to move freely along each guiding track 18, 20. Once in position "B", said weight 12 is ready for collection to be transferred back to the first storing unit 14. More specifically, loading stage 32 can collect weight 12 from the second portion 28 of the upper guiding track 20, lower said weight 12 to the lower guiding track 18 and offload said weight 12 on to the first portion 22 of lower guiding track 18. Again, said weight 12 will move from the first, higher portion 22 to the second, lower portion 24 of guiding track 18. Thus, weight 12 is once more ready for collection to be lifted back up to the upper storing unit 16 and thus to start a new cycle.

[0019] The system shown in figure 1 can be used to lift weights 12 from the lower storing unit 14 to the upper storing unit 16 during a first peak electricity period and to lower those weights 12 from the upper storing unit 16 back to the lower storing unit 14 during a second, off-peak electricity period. By varying the duration of the second period relative to the duration of the first period, the released power can be controlled. For instance, if a particular weight 12 is lifted within a duration of 60 minutes and lowered within a duration of 30 minutes, twice the power will be available in the course of the second period.

[0020] Figure 2 shows an embodiment of the energy system, wherein the upper storing unit 16 is arranged near the top of a hill or mountain 100. Loading unit 30, which, in the embodiment shown in figure 2 comprises two lifters 40, 42, lifts weights 12 during a first period from the lower storing unit 14 (not shown in figure 2) up to the second storing unit 16, more particularly, to the first end 26 of guiding track 20 of the second, upper storing unit 16. From said first end 26 the weights 12 will move towards the second end 28, which is arranged at the slightly lower level in comparison to the first end 26. The loading unit 30 can then collect weights 12 from the second end 28 and lower those weights back to the first storing unit 14 during a second period.

[0021] Figure 3 shows details of the loading stage 32. Loading stage 32 comprises a cabin 50 having an opening 52 facing the storing units 14, 16 during raising and lowering operations. A stage guiding track 54 is arranged at the bottom and on the inside of cabin 50. Said stage guiding track forms an extension of the guiding tracks

18, 20 of the lower and upper storing units 14, 16, respectively, when said cabin 50 is substantially aligned with either end of a guiding track 18, 20. In this aligned state, weight 12 having wheels 13 can be readily transferred between cabin 50 and the guiding tracks 18, 20.

[0022] Figure 4 shows two upper storing units 16, 16' at the back of the edge of a mountain, wherein both guiding tracks reach the edge of the mountain 100. On the lifters there will be to every unit an axis on which in this case the axis of unit 16' will be higher than the axis of unit 16 also by raising the height of the lifters more units can be added on the back of the mountain's edge.

[0023] Although the present invention has been described in relation to specific exemplary embodiments thereof, it will be understood by those skilled in the art that variations and modifications can be effected in these exemplary embodiments without departing from the scope of the invention.

Claims

1. Energy storing system, comprising a plurality of weights (12); a first storing unit (14) and a second storing unit (16), wherein the first storing unit (14) is arranged below the second storing unit (16) and each of the storing units (14, 16) comprises a guiding track (18, 20) on which weights (12) can be placed and along which weights (12) can be moved, **characterised in that** each of said guiding tracks (18, 20) comprises a first portion (22, 26) and a second portion (24, 28), wherein the second portion (24, 28) is arranged below the first portion (22, 26); and a loading unit (30) configured to lift at least one weight (12) from the first storing unit (14) to the second storing unit (16) during a first period thereby converting electrical energy to potential energy, said loading unit (30) further configured to lower at least one weight (12) from the second storing unit (16) to the first storing unit (14) during a second period, thereby converting potential energy to electrical energy, wherein the loading unit (30) is configured to collect a weight (12) from the second portion (24) of the first storing unit (14) and to place said weight on the first portion (26) of the second storing unit (16) during the first period and to collect a weight (12) from the second portion (28) of the second storing unit (16) and to place said weight (12) on the first portion (22) of the first storing unit (14) during the second period.
2. Energy storing system according to claim 1, wherein each weight (12) comprises means such as wheels (13) configured to allow said weight to move freely along the guiding track (18, 20), on which said weight is placed, from the first portion (22, 26) to the second portion (24, 28) of said guiding track (18, 20).

3. Energy storing system according to any one of the preceding claims, wherein the loading unit (30) comprises a loading stage (32) having a stage guiding track (54) configured to co-operate with the respective guiding track (18, 20) of any of the storing units (14, 16) to facilitate transfer of a weight between the loading stage (30) and the respective guiding track (18, 20).
4. Energy storing system according to any one of the preceding claims, comprising a multitude of storing units arranged at different heights.
5. Energy storing system according to any one of the preceding claims, wherein the duration of the second period is different from the duration of the first period.
6. Method for converting energy with an energy storing system, the energy storing system comprising a plurality of weights (12), a first storing unit (14) and a second storing unit (16), wherein the first storing unit (14) is arranged below the second storing unit (16) and each of the storing units (14, 16) comprises a guiding track (18, 20) on which weights (12) can be placed and along which weights (12) can be moved, each of said guiding tracks (18, 20) comprises a first portion (22, 26) and a second portion (24, 28), wherein the second portion (24, 28) is arranged below the first portion (22, 26), **characterized in** comprising lifting at least one weight (12) from the first storing unit (14) to the second storing unit (16) during a first period thereby converting electrical energy to potential energy; lowering at least one weight (12) from the second storing unit (16) to the first storing unit (14) during a second period, thereby converting potential energy to electrical energy; collecting a weight (12) from the second portion (24) of the first storing unit (14) and to place said weight on the first portion (26) of the second storing unit (16) during the first period; and collecting a weight (12) from the second portion (28) of the second storing unit (16) and to place said weight (12) on the first portion (22) of the first storing unit (14) during the second period.
7. Method according to claim 6, wherein the second period is shorter than the first period.
8. Method according to any one of claims 6 or 7, wherein the second period is longer than the first period.
9. Method according to any one of claims 6 to 8, wherein the first period is an off-peak electricity period and the second period is a peak electricity period.

Patentansprüche

1. Energiespeicherungssystem, das eine Mehrzahl von Gewichten (12), eine erste Speichereinheit (14) und eine zweite Speichereinheit (16) aufweist, wobei die erste Speichereinheit (14) unterhalb der zweiten Speichereinheit (16) angeordnet ist und jede der Speichereinheiten (14, 16) eine Führungsschiene (18, 20) aufweist, auf der Gewichte (12) angeordnet werden können, und entlang der Gewichte bewegt werden können,

dadurch gekennzeichnet, dass

jede der Führungsschienen (18, 20) einen ersten Teil (22, 26) und einen zweiten Teil (24, 28) aufweist, wobei der zweite Teil (24, 28) unter dem ersten Teil (22, 26) angeordnet ist, sowie eine Ladeeinheit (30), die dazu eingerichtet ist, während einer ersten Zeitspanne mindestens ein Gewicht (12) von der ersten Speichereinheit (14) zu der zweiten Speichereinheit (16) zu heben und dabei elektrische Energie in potentielle Energie umzuwandeln, wobei die Ladeeinheit weiterhin dazu eingerichtet ist, während einer zweiten Zeitspanne mindestens ein Gewicht (12) von der zweiten Speichereinheit (16) zu der ersten Speichereinheit (14) abzusinken und dabei potentielle Energie in elektrische Energie umzuwandeln, wobei die Ladeeinheit (30) dazu eingerichtet ist, ein Gewicht (12) von dem zweiten Teil (24) der ersten Speichereinheit (14) abzuholen und das Gewicht während der ersten Zeitspanne auf dem ersten Teil (26) der zweiten Speichereinheit anzuordnen, und ein Gewicht (12) von dem zweiten Teil (28) der zweiten Speichereinheit (16) abzuholen und das Gewicht (12) während der zweiten Zeitspanne auf dem ersten Teil der ersten Speichereinheit (14) anzuordnen.
2. Energiespeicherungssystem gemäß Anspruch 1, wobei jedes Gewicht (12) Mittel, z.B. Räder (13), aufweist, die dazu eingerichtet sind, es dem Gewicht zu ermöglichen, sich frei entlang der Führungsschiene (18, 20), auf der das Gewicht angeordnet ist, vom ersten Teil (22, 26) der Führungsschiene (18, 20) zu deren zweitem Teil zu bewegen.
3. Energiespeicherungssystem gemäß einem der vorangehenden Ansprüche, wobei die Ladeeinheit (30) ein Ladegestell (32) mit einer Gestellführungsschiene (54) aufweist, das eingerichtet ist, mit der jeweiligen Führungsschiene (18, 20) einer der Speichereinheiten (14, 16) zusammenzuwirken, um die Überführung eines Gewichts zwischen dem Ladegestell (30) und der jeweiligen Führungsschiene (18, 20) zu erleichtern.
4. Energiespeicherungssystem gemäß einem der vorangehenden Ansprüche, das eine Mehrzahl an Speichereinheiten aufweist, die auf verschiedenen Höhen angeordnet sind.
5. Energiespeicherungssystem gemäß einem der vorangehenden Ansprüche, wobei die Dauer zweiten Zeitspanne von der Dauer der ersten Zeitspanne verschieden ist.
6. Verfahren zum Umwandeln von Energie mit Hilfe eines Energiespeicherungssystems, wobei das Energiespeicherungssystem eine Mehrzahl an Gewichten (12), eine erste Speichereinheit (14) und eine zweite Speichereinheit (16) aufweist, wobei die erste Speichereinheit (14) unterhalb der zweiten Speichereinheit (16) angeordnet ist und jede der Speichereinheiten (14, 16) eine Führungsschiene (18, 20) aufweist, auf der Gewichte (12) angeordnet werden können, und entlang der Gewichte (12) bewegt werden können, wobei jede der Führungsschienen (18, 20) einen ersten Teil (22, 26) und einen zweiten Teil (24, 28) aufweist, wobei der zweite Teil (24, 28) unterhalb des ersten Teils angeordnet ist,

gekennzeichnet durch

Heben mindestens eines Gewichts (12) von der ersten Speichereinheit (14) zu der zweiten Speichereinheit (16) während einer ersten Zeitspanne und damit Umwandeln elektrischer Energie in potentielle Energie;

Ablassen mindestens eines Gewichts (12) von der zweiten Speichereinheit (16) zu der ersten Speichereinheit (14) während einer zweiten Zeitspanne und damit Umwandeln potentieller Energie in elektrische Energie;

Abholen eines Gewichts (12) vom zweiten Teil (24) der ersten Speichereinheit (14) und Anordnen des Gewichts auf dem ersten Teil der zweiten Speichereinheit (16) während der ersten Zeitspanne; und

Abholen eines Gewichts (12) vom zweiten Teil (28) der zweiten Speichereinheit (16) und Anordnen des Gewichts (12) auf dem ersten Teil der ersten Speichereinheit (14) während der ersten Zeitspanne.
7. Verfahren gemäß Anspruch 6, wobei die zweite Zeitspanne kürzer als die erste Zeitspanne ist.
8. Verfahren gemäß einem der Ansprüche 6 oder 7, wobei die zweite Zeitspanne länger als die erste Zeitspanne ist.
9. Verfahren gemäß einem der Ansprüche 6 bis 8, wobei die erste Zeitspanne eine Zeitspanne außerhalb des Elektrizitäts-Spitzenverbrauchs und die zweite Zeitspanne eine Zeitspanne während des Elektrizitäts-Spitzenverbrauchs ist.

Revendications

1. Système de stockage d'énergie comprenant une pluralité de poids (12) ; une première unité de stockage (14) et une seconde unité de stockage (16),

dans lequel la première unité de stockage (14) est agencée au-dessous de la seconde unité de stockage (16) et chacune des unités de stockage (14, 16) comprend un rail de guidage (18, 20) sur lequel des poids (12) peuvent être placés et le long desquels des poids (12) peuvent être déplacés,
caractérisé en ce que :

chacun desdits rails de guidage (18, 20) comprend une première partie (22, 26) et une seconde partie (24, 28), dans lequel la seconde partie (24, 28) est agencée au-dessous de la première partie (22, 26) ; et une unité de chargement (30) configurée pour lever au moins un poids (12) de la première unité de stockage (14) à la seconde unité de stockage (16) pendant une première période, convertissant ainsi l'énergie électrique en énergie potentielle, ladite unité de chargement (30) étant en outre configurée pour abaisser au moins un poids (12) de la seconde unité de stockage (16) à la première unité de stockage (14) pendant une seconde période, convertissant ainsi l'énergie potentielle en énergie électrique, dans lequel l'unité de chargement (30) est configurée pour collecter un poids (12) de la seconde partie (24) de la première unité de stockage (14) et pour placer ledit poids sur la première partie (26) de la seconde unité de stockage (16) pendant la première période et pour collecter un poids (12) de la seconde partie (28) de la seconde unité de stockage (16) et pour placer ledit poids (12) sur la première partie (22) de la première unité de stockage (14) pendant la seconde période.

2. Système de stockage d'énergie selon la revendication 1, dans lequel chaque poids (12) comprend des moyens tels que des roues (13), configurés pour permettre audit poids de se déplacer librement le long du rail de guidage (18, 20) sur lequel ledit poids est placé, de la première partie (22, 26) à la seconde partie (24, 28) dudit rail de guidage (18, 20).
3. Système de stockage d'énergie selon l'une quelconque des revendications précédentes, dans lequel l'unité de chargement (30) comprend un étage de chargement (32) ayant un rail de guidage d'étage (54) configuré pour coopérer avec le rail de guidage (18, 20) respectif de l'une quelconque des unités de stockage (14, 16) afin de faciliter le transfert d'un poids entre l'étage de chargement (30) et le rail de guidage (18, 20) respectif.
4. Système de stockage d'énergie selon l'une quelconque des revendications précédentes, comprenant une multitude d'unités de stockage agencées à différentes hauteurs.

5. Système de stockage d'énergie selon l'une quelconque des revendications précédentes, dans lequel la durée de la seconde période est différente de la durée de la première période.

6. Procédé pour convertir l'énergie avec un système de stockage d'énergie, le système de stockage d'énergie comprenant une pluralité de poids (12), une première unité de stockage (14) et une seconde unité de stockage (16), dans lequel la première unité de stockage (14) est agencée au-dessous de la seconde unité de stockage (16) et chacune des unités de stockage (14, 16) comprend un rail de guidage (18, 20) sur lequel des poids (12) peuvent être placés et le long desquels des poids (12) peuvent être déplacés, chacun desdits rails de guidage (18, 20) comprend une première partie (22, 26) et une seconde partie (24, 28), dans lequel la seconde partie (22, 26),
caractérisé en ce qu'il comprend les étapes consistant à :

lever au moins un poids (12) de la première unité de stockage (14) à la seconde unité de stockage (16) pendant une première période, convertissant ainsi l'énergie électrique en énergie potentielle ;
 abaisser au moins un poids (12) de la seconde unité de stockage (16) à la première unité de stockage (14) pendant une seconde période, convertissant ainsi l'énergie potentielle en énergie électrique ;
 collecter un poids (12) de la seconde partie (24) de la première unité de stockage (14) et pour placer ledit poids sur la première partie (26) de la seconde unité de stockage (16) pendant la première période ; et
 collecter un poids (12) de la seconde partie (28) de la seconde unité de stockage (16) et pour placer ledit poids (12) sur la première partie (22) de la première unité de stockage (14) pendant la seconde période.

7. Procédé selon la revendication 6, dans lequel la seconde période est plus courte que la première période.

8. Procédé selon l'une quelconque des revendications 6 ou 7, dans lequel la seconde période est plus longue que la première période.

9. Procédé selon l'une quelconque des revendications 6 à 8, dans lequel la première période est une période d'électricité hors pointe et la seconde période est une période de pointe d'électricité.

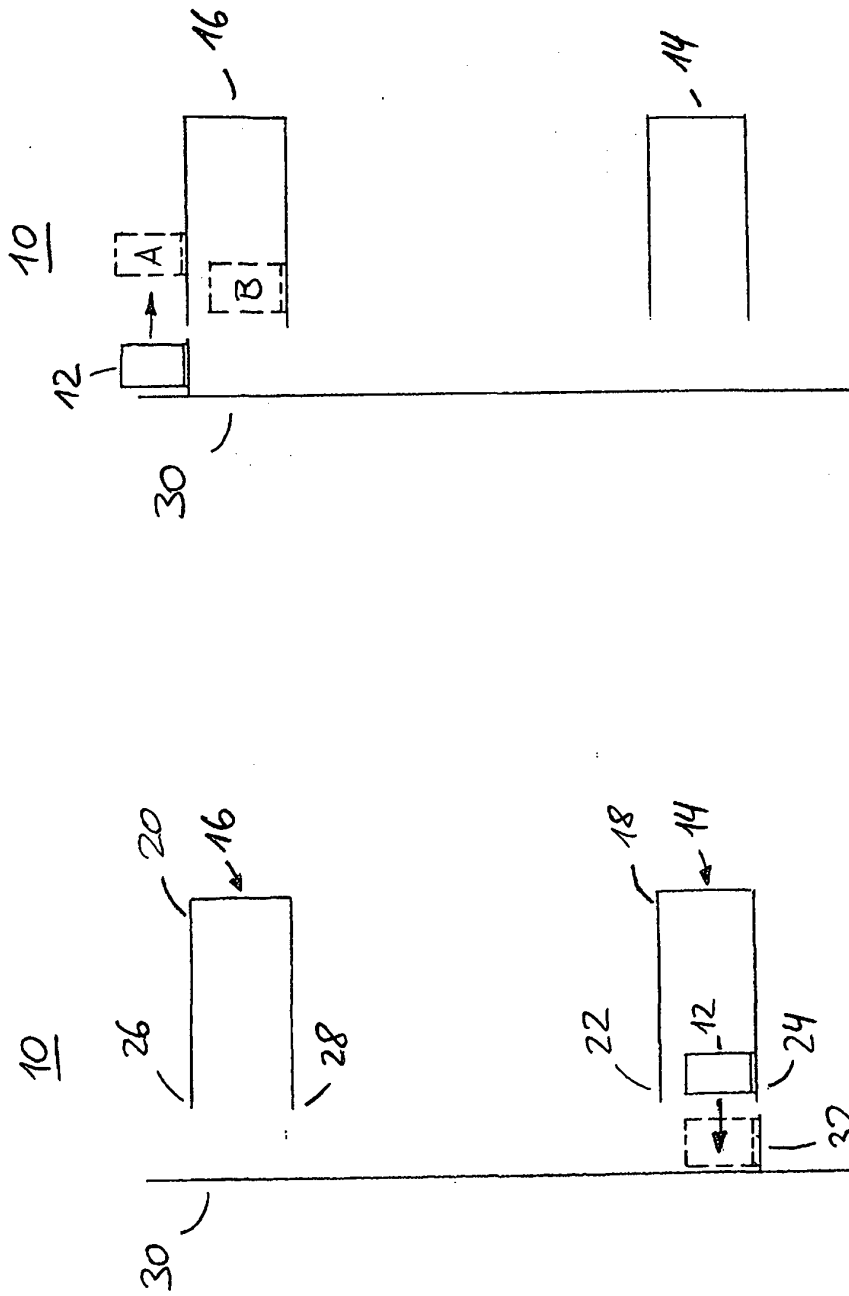


Fig. 1

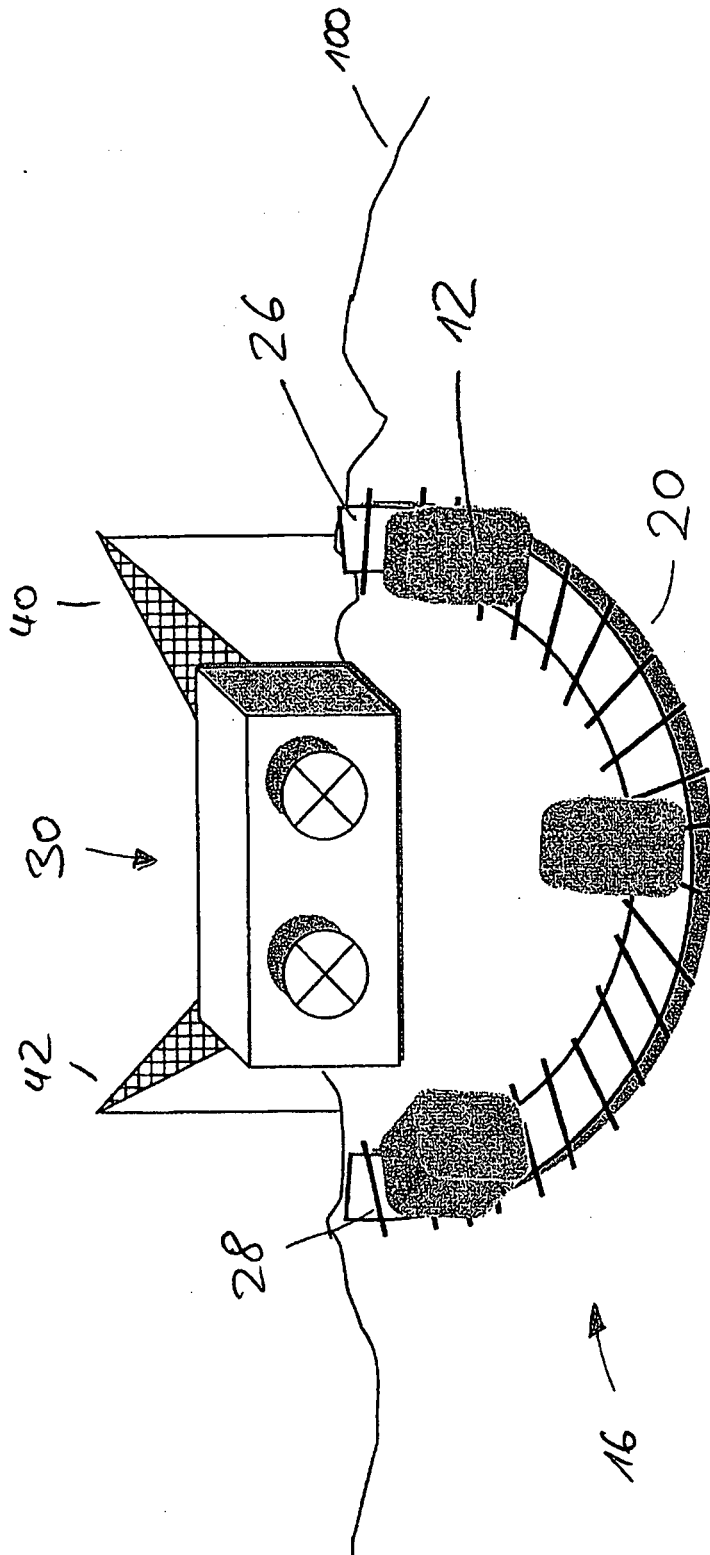


Fig. 2

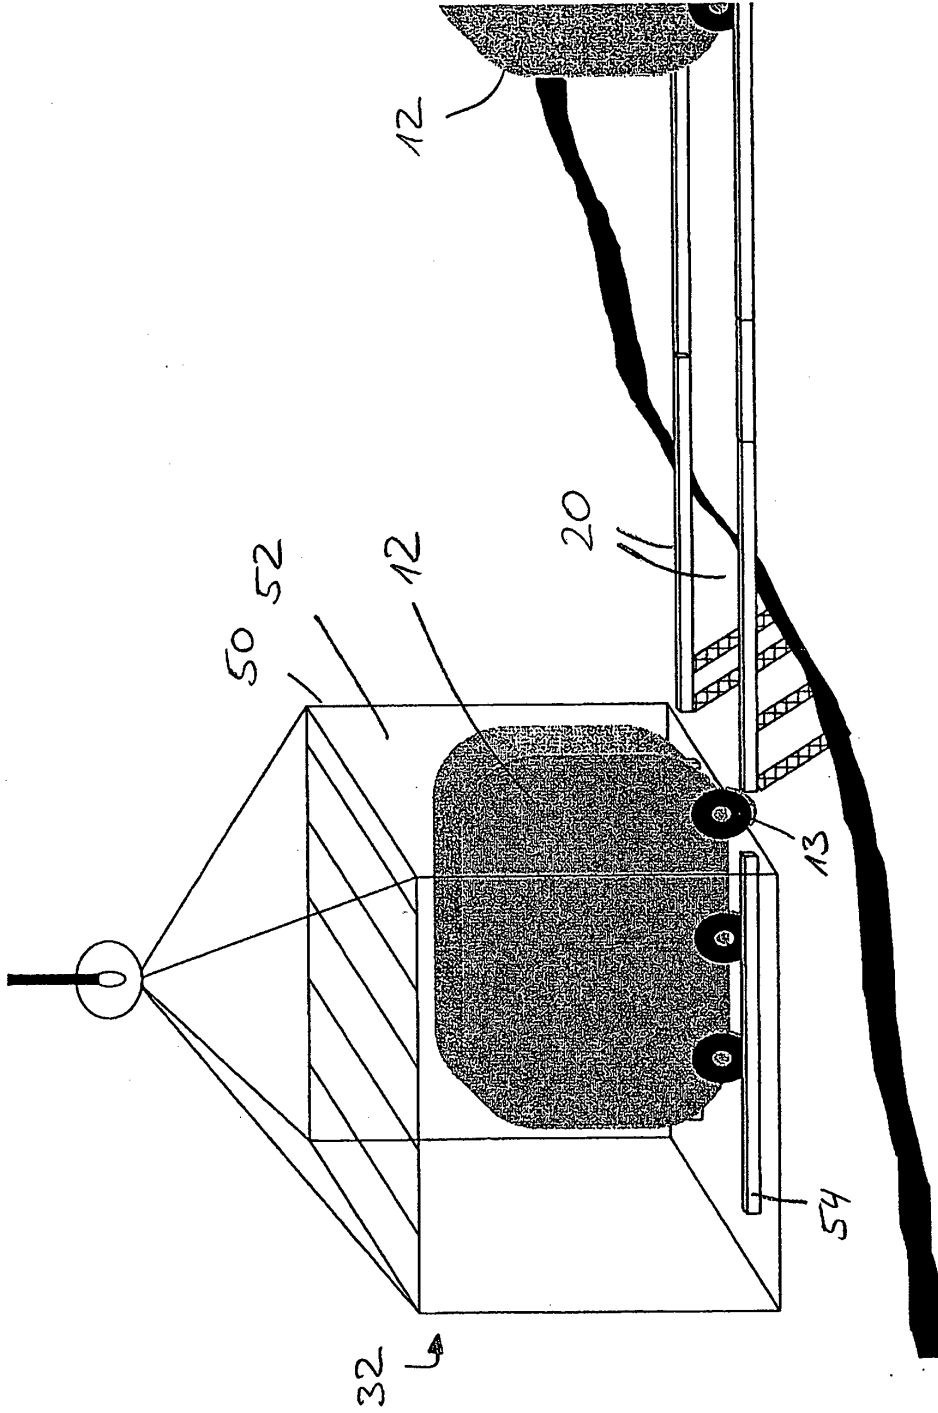


Fig. 3

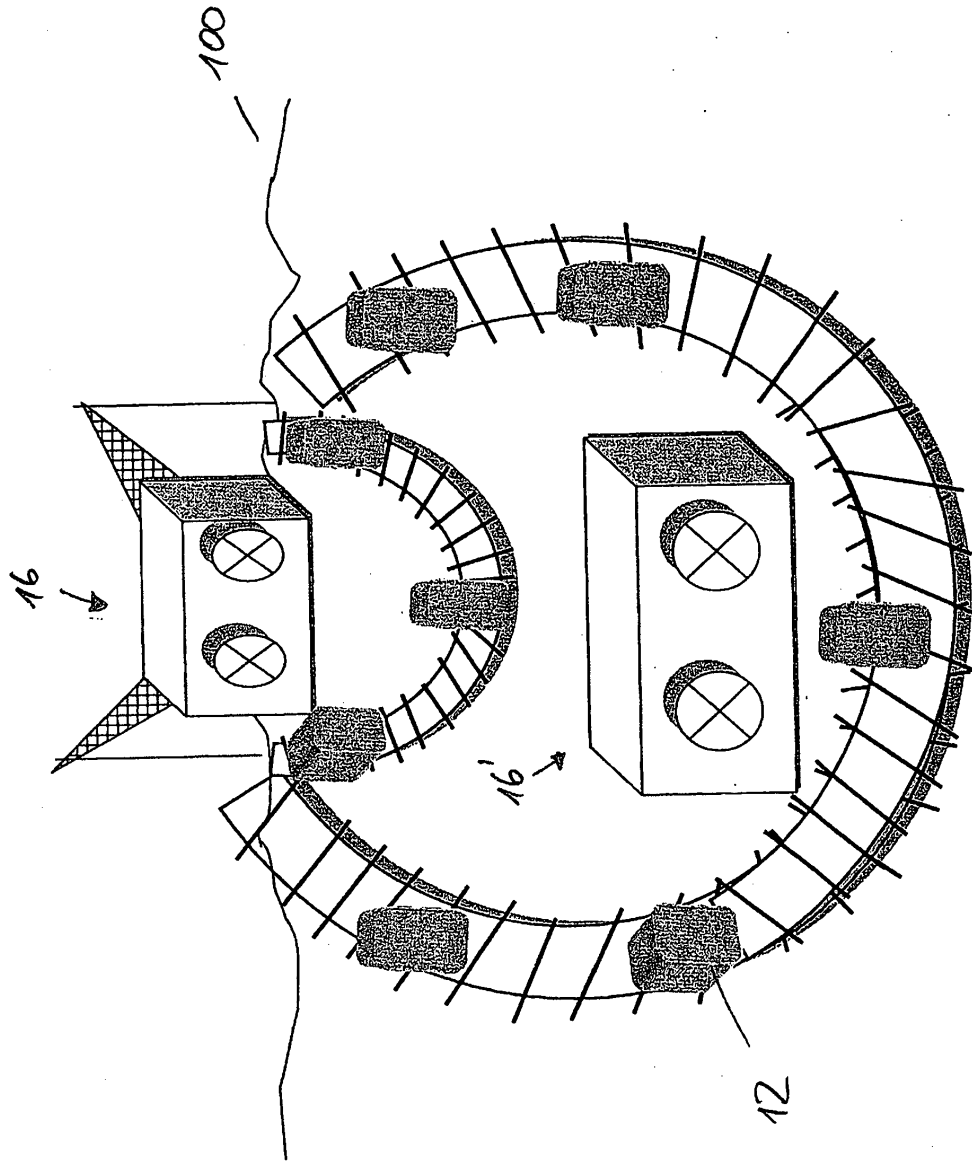


Fig. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5873249 A [0003]
- GB 2224807 A [0003]
- DE 202004011770 U1 [0003]